
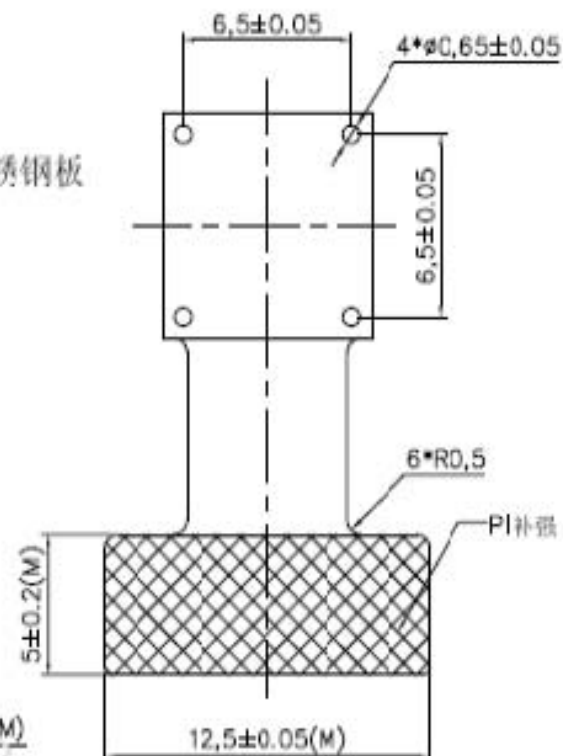
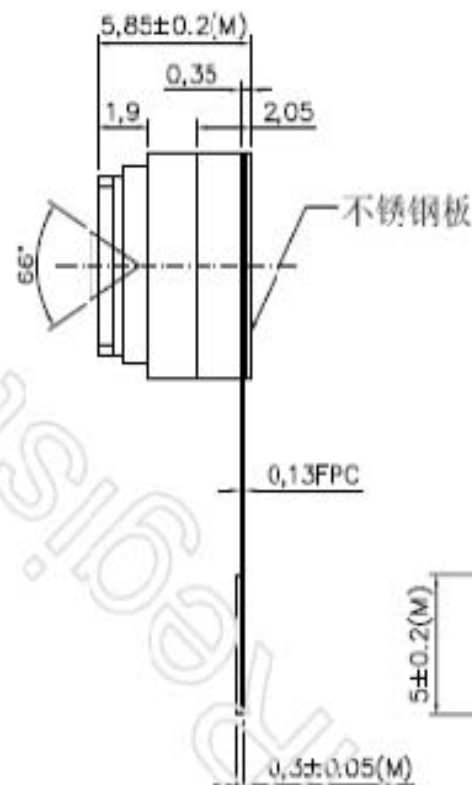


CONNECTOR
24PIN DESCRIPTION

PIN	SIGNAL
1	NC
2	AGND
3	SIO_D
4	AVDD
5	SO_C
6	RESET
7	VSYNC
8	PWDN
9	HREF
10	DVDD
11	DOVDD
12	Y9
13	XCLK
14	Y8
15	DGND
16	Y7
17	PCLK
18	Y6
19	Y2
20	Y5
21	Y3
22	Y4
23	Y1
24	Y0

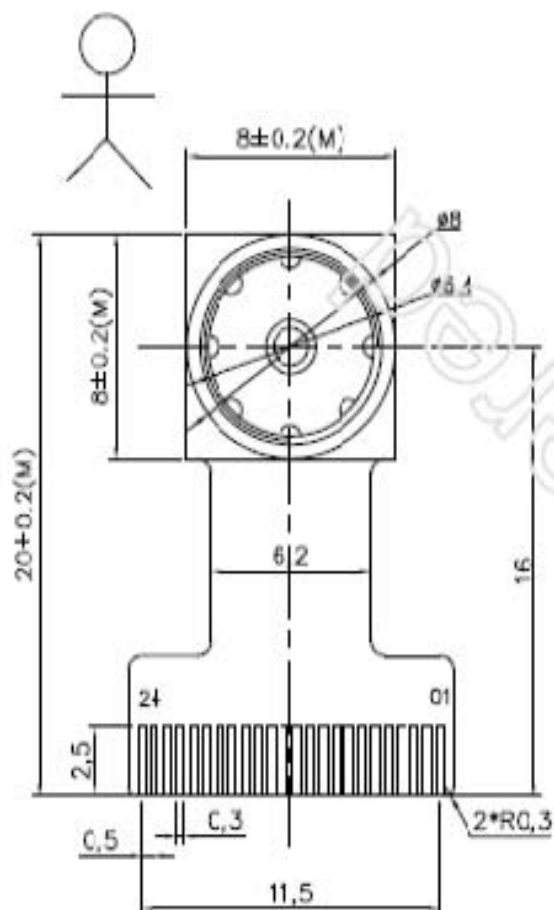

4/0	All	Change the lens type	zhfeng li	05-Nov-08
2/0	All	Change the Goldfinger of positive	zhfeng li	10-Sep-08
1/0	All	First Release	zhfeng li	08-Sep-08
REV.	Zone	Description	Approved	Date

Parameter

SELECT	A	B	C	D	EFL	3.9mm	Depth Of Field	310mm
level dim					F/NO	2.8	pixel	640*480
~ 5	±0.03	±0.05	±0.08	±0.10	View Angle	66°	Lens Type	1/4 inch
5~10	±0.05	±0.08	±0.10	±0.15	Distortion	<1.0%	Image Sensor	OV7725
10~50	±0.08	±0.10	±0.15	±0.20				
50~100	±0.10	±0.15	±0.20	±0.25				
100~	±0.10%	±0.15%	±0.20%	±0.30%				

Designed By	peter	Client Name	FYV03F007-V7725
Checked By	Feng Liu	Model Name	FYV03F007-V7725_MODULE
Approved By	Feng Liu	Projection Type	Third Angle
		Unit	mm
		Scale	1:1
		Sheet	1 of 1
		Version	4/0